
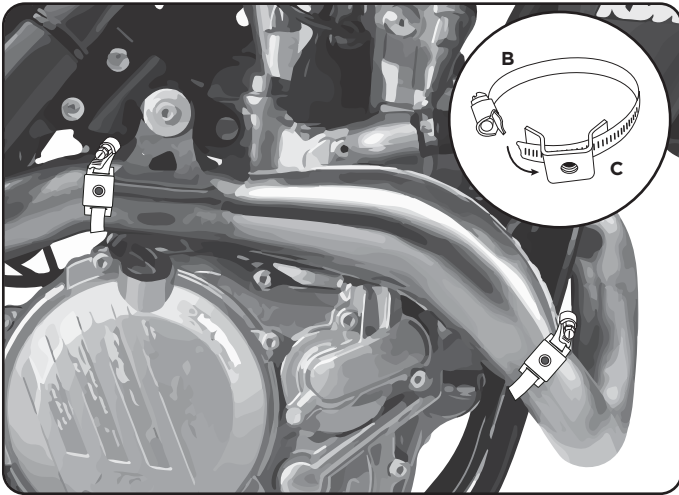



X-EXHAUST PARACALORE X - EXHAUST

ACERBIS


COD. 500007707

ACERBIS PARTS

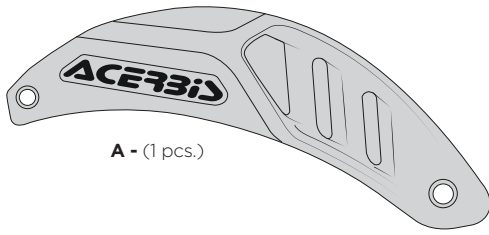

1 - Insert the threaded plates (C) into the hose clamps (B) and then attach to the muffler loosely.

1 - Inserire la fascetta (B) nella piastrina (C) e posizionare sulla marmitta. Stringere senza serrare completamente.

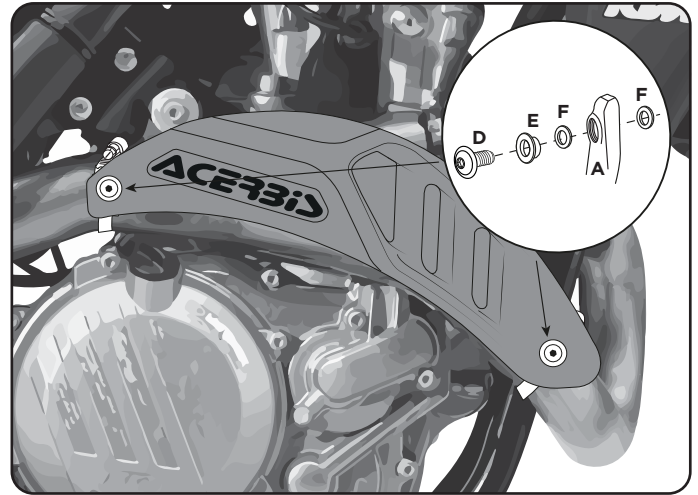

2 - Attach the head shield (A) with the supplied bolt (D) and bushings (E) and washers (F) as indicated in the image above. Tighten loosely.

2 - Fissare paracalore (A) tramite: boccole (E), rondelle (F) e viti (D) in dotazione. Stringere senza serrare completamente.



3 - Arrange the shield and clamps so that the shield is a minimum of 8mm away from the exhaust pipe and tighten the clamps (B). Then tighten the head shield to the clamps and torque to 4nm. After one hour of use, check the tightness of the clamps and shield and tighten if needed.

3 - Serrare completamente le fascette calcolando la corretta distanza del paracalore minimo 8 mm dallo scarico e di conseguenza stringere completamente le viti (4 Nm). Dopo 1h di utilizzo in moto, ricontrollare il serraggio delle viti (D) e delle fascette (B).

ACERBIS ITALIA S.P.A. VIA SERIO, 37 - 24021 ALBINO (BG) - ITALY

Phone +39 035773577 - Fax +39 035773570 - INFOMOTO@ACERBIS.IT - WWW.ACERBIS.COM

ACERBIS U.S.A. Inc.

MAIL P.O. BOX 2030 SUN VALLEY, ID 83353 SHIP 110 LINDSAY CIRCLE KETCHUM, ID 83340

Phone (800) 659-1440 - Fax (208) 726-7039 - INFOUSA@ACERBIS.COM

ACERBIS U.K. Ltd

UNIT 2 LUTON ENTERPRISE PARK SUNDON PARK ROAD LUTON, BEDFORDSHIRE LU3 3GU GREAT BRITAIN

Phone +44 1582491076 - Fax +44 1582499639 - UKINFO@ACERBIS.IT